## FOR INDUSTRIAL USE ONLY. FOR ENERGIZED EQUIPMENT LISE ONLY MULTI-USE APPLICATIONS.

FORCE 100® is an ideal cleaner/degreaser, formulated for industrial applications. It quickly penetrates dirt, grease, wax, grime, adhesives and many other soils while evaporating film free. Ideally suited for general grease and soil removal.

FORCE 100® is high in dielectric strength and is non-flammable, making it the best solvent choice for use on electric motors, generators, relays, cables, controls and other non-water safe surfaces. FORCE 100® can be sprayed into electric equipment while in operation for complete and convenient cleaning. Helps improve electrical properties and efficiencies by removing contaminants.

FORCE 100® is recommended for cleaning all polyethylene and EPR cable insulations and semi-conducting shields along with splice, and termination materials which are common in the electrical and power industry.

Energized equipment use only. Not to be used for motorized vehicle maintenance, or their parts.

### **IDEAL FOR USE ON:**

- Electric Motors
- Gears
- Generators Power Tools
- Cables Air Tools
- Windings
- Breakers
- Air Conditioners Marine Equipment

### SUITABLE FOR USE ON:

- Aluminum
- Steel
- Chrome • Brass
- Copper • Glass
- Ceramic
- Marble

- Bakelite
- Polvethylene
- Polypropylene

- PTFE/TFE/FEP
- Teflon®
- Epoxy
- Acetal/Delrin/Celcon
- Viton
- · PET/Mylar/Dacron Nylon
- PVA (Polyvinyl Alcohol)
- · and other solvent-resistant Plastics, Fabrics and most Coated Surfaces.


DO NOT USE ON AUTOMATED ELECTRONIC PROCESS CONTROL OR MONITORING SYSTEMS, COMPUTERS, OR DATA PROCESSING EQUIPMENT, MAY EFFECT CERTAIN PLASTICS, TEST BEFORE USING.

#### DIRECTIONS:

Saturate area to be cleaned and use flushing action to remove contaminants. A brief soak or agitation before flush off will aid in removal of stubborn deposits. Attach void injector or high volume flush valve for additional cleaning

Note: FORCE 100® is a powerful solvent. Do not use on, or allow contact with solvent sensitive plastics or other surfaces. Always spot test first.

See Safety Data Sheet for complete safety information. 24 HOUR MEDICAL EMERGENCY: 1-800-535-5053.

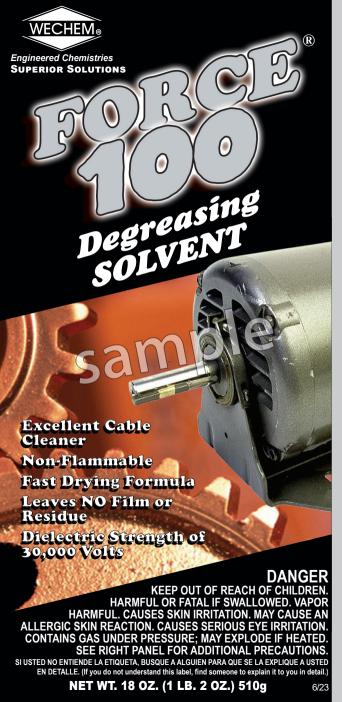







DANGER: Keep out of reach of children. Read label and SDS before use. Contains gas under pressure: may explode if heated. May cause cancer; suspected of causing genetic deffects (route of exposure: inhalation). May cause drowsiness or dizziness. Causes skin irritation. May cause an allergic skin reaction. Causes serious eve irritation.

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not breathe mist/vapors/spray. Use only outdoors or in a well-ventilated area. Pressurized container: Do not pierce or burn, even after use. Wash hands and face thoroughly after handling. Wear protective gloves, clothing, and eye protection. Do not eat, drink or smoke when using this product. Contaminated clothing must not be allowed out of the workplace.

FIRST AID: IF SWALLOWED: Immediately call a poison center or a doctor. Do NOT induce vomiting. IF ON SKIN: Wash with plenty of soap and water. If skin irritation or rash occurs get medical attention. Take off contaminated clothing and wash it before reuse. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention. **IF INHALED:** Remove person to fresh air and keep comfortable for breathing. Call a poison center or a doctor if you feel unwell. IF EXPOSED OR CONCERNED: Get medical attention.

Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Store in a well-ventilated place. Store locked up. Dispose of contents and container in accordance with all local, regional, and national regulations.

WARNING: This product can expose you to Trichloroethylene, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

INGREDIENTS (C.A.S.#): Trichloroethylene (79-01-6), Carbon Dioxide (124-38-9)

HMIS Ratings: Health: 2; Flammability: 1; Reactivity: 0; Maximum Personal Protection: G

This product is designed exclusively for industrial and institutional use by trained personnel. This product is sold 'as is' and the manufacturer makes no warranty. expressed or implied, of merchantability, and/or fitness for a particular purpose or otherwise.

# **SCAN FOR** SDS



To Reorder: WECHEM, INC. 5734 Susitna Dr. Harahan, LA 70123 504.733.1152 800.426.0512 FAX 504.733.2218 www.wechem.com





