## **CONTAINS NO CFCs**

White Lightning<sup>TM</sup> is a multi-purpose lithium lubricant. It contains zinc oxide in a fine micron particle size and a high viscosity index oil which adds to the lubricity of the product and also acts as a corrosion inhibitor.

Heat Stable to 350°F
Drop Point of 350°F
Good Penetrating Qualities

Excellent Water & Heat Resistance up to 350°F

## **APPLICATIONS AND USES:**

For use on automotive hinges and springs, industrial machinery and tools, marine linkages and cables, and farm machinery.

**AUTOMOTIVE:** Use on accelerator linkage, bearings, break service linkage, radio antenna, cams, gears, hinges, hood locks, door locks, springs, striker, plates, window regulators, all body hardware.

**MARINE:** Excellent for general marine use because of high resistance to rusting and corrosive action.


INDUSTRIAL: Cams and slides, chains, couplings, plain bearings, open gears (small), forklift truck masts.

HOME & OFFICE: Use wherever metal meets metal. Windows, garage doors, hinges, faucets, lawn mowers, bicycles, toys, garden and household tools, fishing reels, guns filing cabinets, office equipment, etc.

**DIRECTIONS FOR USE:** Shake can well before using and between applications. Spray parts. If necessary, repeat application. Avoid overspray of floors and walkways.

WARNING: This product can expose you to chemicals including Titanium Dioxide, Cumene, Naphthalene, Ethylbenzene, Benzene, which are know to the State of California to cause cancer. This product can expose you to chemicals including Toluene, Benzene, which are known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



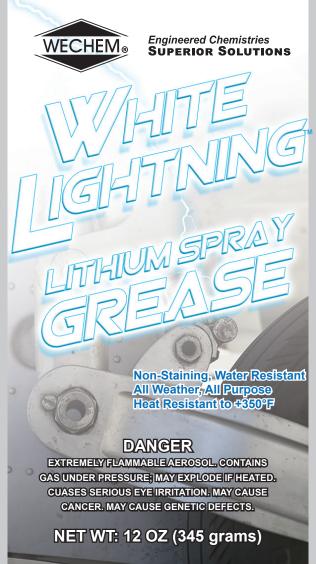









Danger: Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes serious eye irritation May cause cancer. May cause genetic defects. If medical advice is needed, have product container or label at hand. Keep out of reach of children. Read label before use. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Do not spray on an open flame or other ignition source. Do not pierce or burn, even after use. Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves, protective clothing, eye protection and face protection. Wash hands thoroughly after handling. Protect from sunlight. Do not expose to temperatures exceeding 50°C / 122°F. Store in a well-ventilated place. Store locked up. Dispose of contents and container in accordance with level regional, national and integrational regulations.

IF exposed or concerned: Get medical attention.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.

CONTAINS (CAS No:) Petroleum Gases, Liquefied, Sweetened (68476-86-8), Petrolatum (8009-03-8), n-Heptane (142-82-5), Mineral Oil (8042-47-5), Heptane, branched, cyclic and linear (42620-76-6), VM & P Naphtha (64742-49-0), Aliphatic, Light Hydrocarbon Solvent (64742-89-8), Zinc Oxide (1314-13-2), Heavy Aliphatic Naphtha (64742-96-7), Titanium dioxide (13463-67-7)

**CAUTION:** Use only with adequate ventilation to control air contaminants to their exposure limits. The use of local ventilation is recommended to control emissions near the source.

## KEEP OUT OF REACH OF CHILDREN.

See Safety Data Sheet for complete information. 24 HOUR MEDICAL EMERGENCY: 1-800-535-5053 NOT FOR SALE IN CA.



WECHEM, INC. 5734 Susitna Dr. Harahan, LA 70123 504.733.1152 · 1.800.426.0512 FAX 504.733.2218 · www.wechem.com